EXTERNAL LINE MATCH TRANSFORMER

The external line match (00530) transformer kit is designed to achieve full output power when operating single phase High Frequency X-Ray controls from 208 or 220 VAC line.

SPECIFICATIONS

Transformer compatibility for 1-Phase	Generator Power options: 20, 30, 42 kW	
Input Ratings	Line Voltage: 208/220/277VAC, 1-Phase Line Frequency: 50/60 Hz Max Momentary Currents: 231A @ 208VAC 218A @ 220VAC 173A @ 277VAC (optional) Long Time Current: 3A @ 208/220/277VAC	
Output Ratings	Voltage: 240VAC, 1-Phase Max Momentary Current: 200A @ 240VAC Long Time Current: 3A @ 240VAC	
Shipping Dimensions & Weight	W x L x H (inches)	WEIGHT
	24 x 14 x 16	60 lbs.

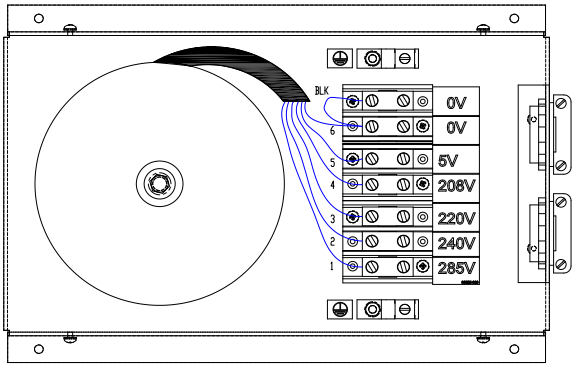

INTERNAL TOP VIEW

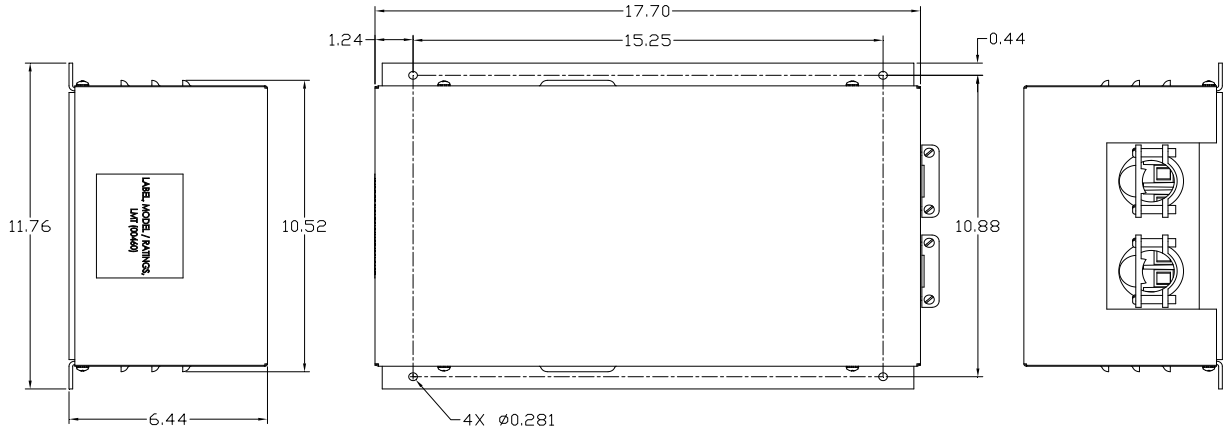

Estimated Heat Output: 820 BTU/hour
Note: Flexible Line Cable is not provided.

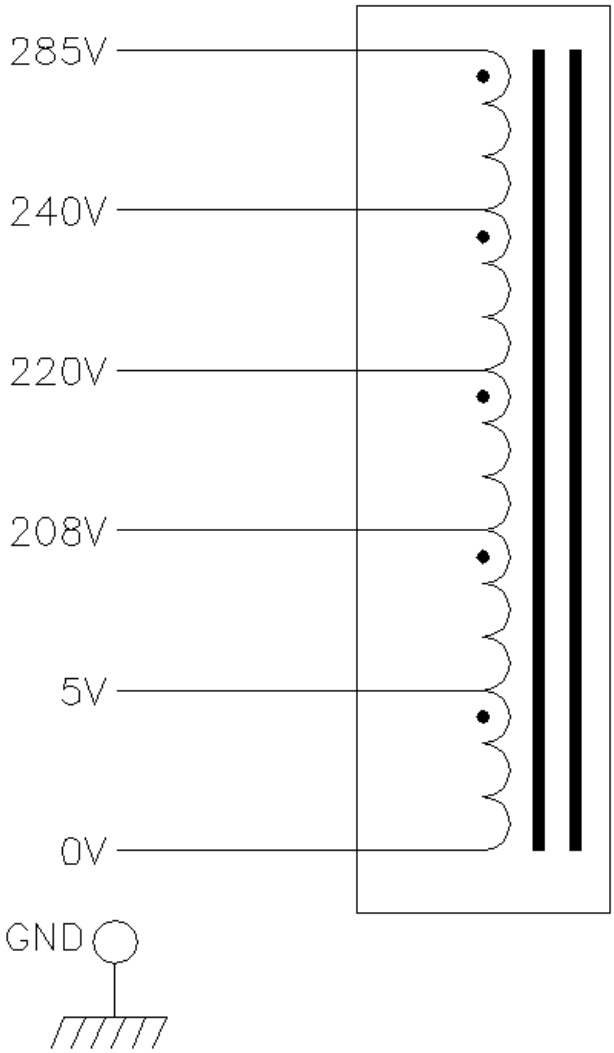

CONNECTION CHART			
LINE VOLTAGE	**LINE CONNECTION**	**DESIRED GEN. VOLTAGE**	**GENERATOR CONNECTION**
200-214	0V, 208V	240	0V, 240V
215-230	0V, 220V	240	0V, 240V
270-285	5V, 285V	240	0V, 240V